

HEX WASHER HEAD



High Hex for better driving stability!



Metal Roof Clip Screw



Heavy Gauge Applications - DP4 & DP5 Points

- Drill and tap up to 1/2" thick steel.
- Supplied with TRI-SEAL™ long life coating for superior corrosion protection.
- Lengths up to 8" for retrofit metal roof base attachment.



- ▶ The hex washer head is the most popular drive system and provides the best stability during installation.
- ▶ Available with TRI-SEAL™ long life coating for the ultimate corrosion protection...1,000 hrs salt spray with no red rust!

SIZES AND PERFORMANCE SPECIFICATIONS

Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity
#8-18 x 1/2"	DP2	.036" - .100"	.205"	10M
#8-18 x 5/8"	DP2	.036" - .100"	.330"	10M
#8-18 x 3/4"	DP2	.036" - .100"	.455"	10M
A #8-18 x 1"	DP2	.036" - .100"	.705"	7.5M
#8-18 x 1-1/4"	DP2	.036" - .100"	1.000"	5M
#8-18 x 1-1/2"	DP2	.036" - .100"	1.205"	5M
#8-18 x 2"	DP2	.036" - .100"	1.750"	1.5M
#10-16 x 1/2"	DP3	.036" - .175"	.150"	10M
#10-16 x 5/8"	DP3 (HH)	.036" - .175"	.200"	10M
#10-16 x 3/4"	DP3 (HH)	.036" - .175"	.325"	7.5M
B #10-16 x 1"	DP3	.036" - .175"	.575"	5M
#10-16 x 1-1/2"	DP3	.036" - .175"	1.075"	3M
#10-16 x 2"	DP3	.036" - .175"	1.500"	2M
#10-16 x 3"	DP3	.036" - .175"	2.500"	1M

"HH" Denotes High Hex

MATERIAL: C1018-1022 Carbon Steel

PLATING: Standard: .0003" Min. Electro Zinc (46hrs Salt Spray - ASTM B117)

Meets ASTM C 1513-04 and AISI TS-4-02 Standards

Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity
#12-14 x 3/4"	DP3	.036" - .210"	.290"	5M
#12-14 x 1"	DP3	.036" - .210"	.525"	3.5M
#12-14 x 1-1/4"	DP3	.036" - .210"	.750"	3M
C #12-14 x 1-1/2"	DP3	.036" - .210"	1.000"	2M
#12-14 x 2"	DP3	.036" - .210"	1.500"	2M
#12-14 x 2-1/2"	DP3	.036" - .210"	2.000"	1M
#12-14 x 3"	DP3	.036" - .210"	2.500"	1M
D #12-14 x 1-1/4"	DP2 LP	.036" - .200"	.750"	3.5M
E 1/4-14 x 7/8"	DP1 W/VRT	.036" - .090"	.325"	2.5M
1/4-14 x 3/4"	DP3	.036" - .250"	.210"	2.5M
1/4-14 x 1"	DP3	.036" - .250"	.460"	2.5M
1/4-14 x 1-1/4"	DP3	.036" - .250"	.710"	2M
1/4-14 x 1-1/2"	DP3	.036" - .250"	.960"	2M
F 1/4-14 x 2"	DP3	.036" - .250"	1.460"	1.5M
1/4-14 x 2-1/2"	DP3	.036" - .250"	2.460"	1M
1/4-14 x 4"	DP3	.036" - .250"	3.460"	500
1/4-14 x 5"	DP3	.036" - .250"	4.460"	500
1/4-14 x 6"	DP3	.036" - .250"	5.460"	250
1/4-14 x 8"	DP3	.036" - .250"	7.460"	250
G #12-14 x 1-1/4"	DP2 SHLDR	.036" - .200"	.750"	3.5M
5/16-18 x 1"	DP3	.100" - .250"	.460"	1.5M
H 5/16-18 x 1-1/4"	DP3	.100" - .250"	.710"	1.5M
5/16-18 x 1-1/2"	DP3	.100" - .250"	.960"	1.5M
I #12-24 x 7/8"	DP4	.125" - .137"	.325"	5M
#12-24 x 1-1/4"	DP4	.125" - .137"	.375"	3.5M
J #12-24 x 1-1/4"	DP5	.250" - .500"	.375"	3.5M
#12-24 x 1-1/2"	DP5	.250" - .500"	.625"	2.5M
#12-24 x 2"	DP5	.250" - .500"	1.125"	2M
1/4-20 x 1-1/2"	DP5	.250" - .500"	.500"	2M
1/4-20 x 2-1/4"	DP5	.250" - .500"	1.250"	1M
1/4-20 x 3"	DP5	.250" - .500"	2.000"	500
K 1/4-20 x 4"	DP5	.250" - .500"	3.000"	250
1/4-20 x 5"	DP5	.250" - .500"	4.000"	250
1/4-20 x 6"	DP5	.250" - .500"	5.000"	250
1/4-20 x 8"	DP5	.250" - .500"	7.000"	150

MATERIAL: C1018-1022 Carbon Steel

PLATING: Long-Life: TRI-SEAL™ Coating (1,000hrs Salt Spray - ASTM B117)

Meets ASTM C 1513-04 and AISI TS-4-02 Standards




Fasteners for Heavy Gauge use provides superior pullover.

We stock a full line of 1/4-20 diameter BLAZER® drill screws for drilling and tapping up to 1/2" thick steel.

BLAZER® self-drilling screws are engineered to drill and tap high tensile steels more consistently with less effort.

SIZES AND PERFORMANCE SPECIFICATIONS

Size	Point Type	Attachment Thickness	Box Quantity
1/4-20 x 1-1/2"	DP5	.500"	2,000
1/4-20 x 2-1/4"	DP5	1.250"	1,000
1/4-20 x 3"	DP5	2.000"	500
1/4-20 x 4"	DP5	3.000"	250
1/4-20 x 5"	DP5	4.000"	250
1/4-20 x 6"	DP5	5.000"	150
1/4-20 x 8"	DP5	7.000"	150



Innovative features assure High performance and easy installation.

- DP5 drills up to 1/2" thick steel with less effort.
- TRI-SEAL™ coating provides 1,000 hrs salt spray.
- Shank slot and spiral flutes reduce tapping torque.
- 5/8" O.D. washer face produces greater pullover resistance.

Great for retrofit metal roofing base attachment!



PAN FRAMER - ROUND WASHER - PAN HEAD



- ▶ General framing applications
- ▶ Cross recess (phillips) drive.

SIZES AND PERFORMANCE SPECIFICATIONS

	Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity
A	#7-16 x 3/4"	DP2	.036" - .100"	.375"	10M
	#8-18 x 1/2"	DP2	.036" - .100"	.205"	10M
	#8-18 x 5/8"	DP2	.036" - .100"	.330"	10M
	#8-18 x 3/4"	DP2	.036" - .100"	.455"	10M
B	#8-18 x 1"	DP2	.036" - .100"	.705"	7.5M
	#8-18 x 1-1/4"	DP2	.036" - .100"	1.000"	5M
	#8-18 x 1-1/2"	DP2	.036" - .100"	1.205"	5M
	#8-18 x 2"	DP2	.036" - .100"	1.750"	1.5M
C	#10-16 x 1/2"	DP3	.036" - .175"	.150"	10M
	#10-16 x 5/8"	DP3	.036" - .175"	.200"	10M
	#10-16 x 3/4"	DP3	.036" - .175"	.325"	7.5M
	#10-16 x 1"	DP3	.036" - .175"	.575"	5M
	#10-16 x 1-1/4"	DP3	.036" - .175"	.825"	3.5M
	#10-16 x 1-1/2"	DP3	.036" - .175"	1.075"	3M

MATERIAL: C1018-1022 Carbon Steel

PLATING: .0002" Min. Electro Zinc (24hrs Salt Spray)

PANCAKE HEAD SCREWS



#2 Square Drive Power Bit

- ▶ Pancake head provides extra clearance compared to round washer head fasteners.
- ▶ #2 Square/cross recess for exceptional driving stability...NO CAM-OUT!

SIZES AND PERFORMANCE SPECIFICATIONS

	Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity
D	#10-16 x 5/8"	DP3	.036" - .175"	.200"	10M
E	#10-24 x 5/8"	DP3	.036" - .175"	.200"	10M

MATERIAL: C1018 - 1022 Carbon Steel

PLATING: .0003" Min. Electro Zinc with yellow di-chromate (48hrs Salt Spray)

LONG PILOT AND STRESS-LESS FEATURE


Long-pilot Point



Great for Mini-Storage!



STRESS-LESS™
Great for Retrofit Framing

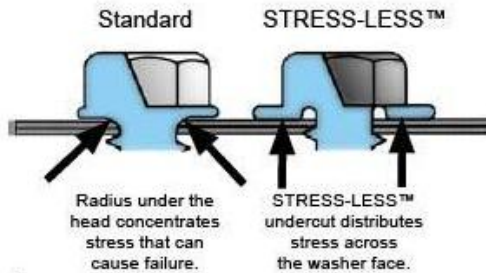

- ▶ Great for steel framing when multiple thicknesses are used.
- ▶ STRESS-LESS™ undercut head is designed to eliminate stress that concentrates under the head of fasteners.

SIZES AND PERFORMANCE SPECIFICATIONS

	Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity
F	#12-14 x 7/8"	DP3	.036" - .210"	.325"	2.5M
G	1/4-14 x 7/8"	DP3	.036" - .250"	.325"	2.5M

MATERIAL: C1018-1022 Carbon Steel

PLATING: .0003" Min. Zinc w/TRI-SEAL™ Coating (1,000hrs Salt Spray)

HEAD TYPE

#12 dia: 5/16" HWH
1/4 dia: 5/16" HWH

410 STAINLESS STEEL DRILL SCREWS



HEAD TYPE

#8 dia: 1/4" HWH
#10 dia: 5/16" HWH
#12 dia: 5/16" HWH
*1/4 dia: 5/16" HWH
1/4 dia: 3/8 HWH

- ▶ Provides corrosion resistance in mild atmospheres.
- ▶ Plated to resist surface rust and to reduce drive torque.
- ▶ For additional corrosion protection, specify TRI-SEAL™ long-life coating.

SIZES AND PERFORMANCE SPECIFICATIONS

	Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity
A	#8-18 x 1/2"	DP2	.036" - .100"	.205"	10M
	#8-18 x 3/4"	DP2	.036" - .100"	.455"	10M
B	#10-16 x 3/4"	DP3	.036" - .175"	.325"	7.5M
	#10-16 x 1"	DP3	.036" - .175"	.575"	5M
	#10-16 x 1-1/2"	DP3	.036" - .175"	1.075"	3M
C	#12-14 x 3/4"	DP3	.036" - .210"	.290"	5M
	*#12-14 x 1"	DP3	.036" - .210"	.525"	3.5M
	*#12-14 x 1-1/4"	DP3 LP	.036" - .210"	.550"	2.5M
	*#12-14 x 1-1/2"	DP3	.036" - .210"	1.000"	2.5M
D	#12-14 x 2"	DP3	.036" - .210"	1.500"	2M
	*#12-14 x 1-1/4"	DP5	.250" - .500"	1.000"	5M
E	#12-14 x 1-1/2"	DP5	.250" - .500"	1.205"	5M
	*1/4-14 x 7/8"	DP1	.036" - .090"	.375"	2.5M
F	*1/4-14 x 1-1/8"	DP1	.036" - .090"	.875"	2.0M
	*1/4-14 x 3/4"	DP3	.036" - .250"	.210"	2.5M
	*1/4-14 x 1"	DP3	.036" - .250"	.460"	2.5M
	*1/4-14 x 1-1/2"	DP3	.036" - .250"	.960"	2M
	1/4-14 x 2"	DP3	.036" - .250"	1.460"	1.5M

MATERIAL: 410 Stainless Steel

PLATING: Passivated (24hrs Salt Spray), Zinc Plated (48hrs Salt Spray),

* Denotes TRI-SEAL™ Coated (1,000hrs Salt Spray)

WOOD-TO-METAL DRILL SCREWS

- ▶ Fasten wood-to-metal.
- ▶ No pre-drilling required.
- ▶ TRI-SEAL™ coated for use in ACQ lumber.

SIZES AND PERFORMANCE SPECIFICATIONS

	Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity
G	#10-24 x 1-7/16"	DP3 WW	.036" - .210"	.750"	4M
H	#12-14 x 1-3/4"	DP2 WW	.036" - .210"	.750"	2M
	#12-14 x 2-1/2"	DP2 WW	.036" - .210"	1.625"	1M
I	#12-24 x 2"	DP4 WW	.036" - .210"	1.250"	2M
	#12-24 x 2-1/2"	DP4 WW	.036" - .210"	1.750"	1M
J	1/4-20 x 2-3/4"	DP4 WW	.125" - .375"	2.000"	900
	1/4-20 x 3-1/4"	DP4 WW	.125" - .375"	2.750"	900
	1/4-20 x 3-3/4"	DP4 WW	.125" - .375"	3.000"	500
K	1/4-20 x 3-1/8"	DP5 WW	.125" - .500"	1.625"	1M

"WW" Denotes With Wings

MATERIAL: Carbon Steel

PLATING: .0003" min zinc TRI-SEAL™ Coated (1,000hrs Salt Spray)

	Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity
L	#10-16 x 1-3/4"	DP3	.036" - .175"	.750"	2.5M
M	#10-24 x 3/4"	DP3	.036" - .175"	.375"	5M
	#10-24 x 1"	DP3	.036" - .175"	.500"	5M
	#10-24 x 1-1/4"	DP3	.036" - .175"	.750"	3.5M
	#10-24 x 1-1/2"	DP3	.036" - .175"	.875"	3M

MATERIAL: Carbon Steel

PLATING: .0003" min zinc TRI-SEAL™ Coated (1,000hrs Salt Spray)



Need to attach wood to thin gauge metal?

Then use #12-14 BLAZER® Header Light Gauge that is designed to fasten to metal as thin as 18-gauge! The threads and wings are engineered for optimal performance when used in thin metal applications.

Need to attach wood to steel that is 1/2" thick?

Then use new 1/4-20 BLAZER® Header Heavy Gauge (1/2" SD), the only wood-to-metal fastener that will drill and tap steel up to 1/2" thick. Engineered for use in heavy steel, it has a special hex-countersunk head that provides optimal driving stability and can also be installed **flush** to the surface of the wood.

Both fasteners have "wings" that remove the wood to minimize jacking and provide drilling consistency.

WOOD-TO-METAL DRILL SCREWS

Header Light Gauge



Header Heavy Gauge



SIZES AND PERFORMANCE SPECIFICATIONS

	Sizes	Point Type	Part Number	Max Attachment Thickness	Box Quantity
A	#12-14 x 1 3/4"	DP2	12175SF3CSTA	.750"	2,000
B	#12-14 x 2 1/2"	DP2	12250SF3CSTA	1.625"	1,000
C	1/4-20 x 3 1/8"	DP5	14312HCSH5CSEC	1.625"	1,000

Attach Into Thin Metal

- ▶ #2 square/phillips recess drive provides stability during installation and eliminates camout!
- ▶ Special thread, wing, and drill point designed to fasten into steel ranging from 18 ga. up to 1/8" thick.



Attach up to 1/2" Thick Steel

- ▶ Flat hex countersunk head provides exceptional stability during installation and can be installed **flush** to the wood surface.
- ▶ DP5 drill point is engineered to drill and tap steel up to 1/2" thick.



Recommended Screw Gun Speed:
2,000 RPM Max

304 STAINLESS STEEL DRILL SCREWS



Manufacturer offers a full line of fasteners manufactured from 304 stainless steel. The fastener head and threads are produced from corrosion resistant stainless steel producing exceptional corrosion protection and superior ductility. A carbon steel drill point is hardened and welded to the body allowing the fastener to drill and tap in steel up to 1/2" thick!

SECURITY SCREWS



Security screws specifically designed for metal siding and roofing applications

TORX® PIN-HEAD

Maximum torque transfer and positive tool engagement means easier drive installation with less pressure and slippage. Torx® Pin Head offers a high degree of security and requires matching drive bit. Available in button head for neat appearance and TRI-SEAL coated for maximum corrosion protection.

BACK-OUT RESISTANT SCREWS



Vibration Resistant Thread (VRT®) is designed to significantly increase back-out torque and reduce the potential for leaks.

VRT® keeps the fastener tighter in applications where expansion, contraction and vibration are a concern.

Independent tests verify that VRT® produces 3-1/2 times more back-out resistance than a standard thread.

Sizes and Technical Data Sheet

Light Gauge Applications

Maximum Drilling Thickness: .090"

	Description	Part Number	Carton Quantity	WT Per M Pcs
	1/4" -14 X 7/8" DP1/LAP w/VRT® CONCEALOR® Pancake Head w/Bonded Sealing Washer TRI-SEAL™ Coated 1,000Hrs Salt Spray	14087C1TSVBW	2,500 pcs 250/Bag	13.5#
	1/4" -14 X 7/8" DP1/LAP w/VRT® BLAZER® Flange Head w/Sealing Washer TRI-SEAL™ Coated 1,000Hrs Salt Spray	14087HW1CSTSVW	2,500 pcs 250/Bag	13.5#
	1/4" -14 X 7/8" DP1/LAP w/VRT® BLAZER® TRI-SEAL™ Coated 1,000Hrs Salt Spray	14087HW1CSTSV	2,500 pcs 250/Bag	10.2#
	1/4" -14 X 7/8" DP1/LAP w/VRT® BLAZER® w/Bonded Sealing Washer TRI-SEAL™ Coated 1,000Hrs Salt Spray	14087HW1CSTSVBW	2,500 pcs 250/Bag	13.5#
	1/4" -14 X 7/8" DP1/LAP w/VRT® BLAZER® Stainless Cap Head w/Sealing Washer TRI-SEAL™ Coated 1,000Hrs Salt Spray	14087HW1CSTSVWSC	2,500 pcs 250/Bag	13.5#
	1/4" -14 X 7/8" DP1/LAP w/VRT® BLAZER® Zinc Cap Head w/Sealing Washer TRI-SEAL™ Coated 1,000Hrs Salt Spray	14087HW1CSTSVWZC	2,000 pcs 250/Bag	13.5#
	1/4" -14 X 1-1/8" DP1/LAP w/VRT® BLAZER® Stainless Cap Head w/Sealing Washer TRI-SEAL™ Coated 1,000Hrs Salt Spray	14112HW1CSTSVWSC	2,000 pcs 250/Bag	19.3#
	#17-14 X 1" TYPE AB w/VRT® TAPPER w/Bonded Sealing Washer (3/4"OD) TRI-SEAL™ Coated 1,000Hrs Salt Spray	17100HHACSTSVOW	2,000 pcs 250/Bag	20#

HIGH PERFORMANCE DRILL SCREWS FOR COMMERCIAL CONSTRUCTION

BLAZER[®] WITH BONDED SEALING WASHER



LP denotes long-pilot design for metal roofing and siding

WASHER DETAILS
20 ga G-90 Galvanized Steel
Vulcanized to .062" thick EPDM
15MM OD Washer

HEAD TYPE
#10 dia: 5/16" HWH
#12 dia: 5/16" HWH
*1/4 dia: 5/16" HWH
1/4 dia: 3/8" HWH



- ▶ **BOND-SEALER™** is a sealing washer that has EPDM vulcanized to a 20 Gauge galvanized backing that will withstand harsh weather conditions.
- ▶ **TRI-SEAL™** long life coated for superior corrosion protection.

SIZES AND PERFORMANCE SPECIFICATIONS

	Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity
A	#10-16 x 1"	DP3	.036" - .175"	.575"	5M
	#10-16 x 1-1/2"	DP3	.036" - .175"	1.075"	3M
B	#12-14 x 3/4"	DP3	.036" - .210"	.290"	5M
	#12-14 x 1"	DP3	.036" - .210"	.525"	3.5M
	#12-14 x 1-1/4"	DP3 LP	.036" - .210"	.750"	3.5M
	#12-14 x 1-1/2"	DP3	.036" - .210"	1.000"	2.5M
	#12-14 x 2"	DP3	.036" - .210"	1.500"	2M
	#12-14 x 2-1/2"	DP3	.036" - .210"	2.000"	1M
C	#12-24 x 1-1/4"	DP5	.250" - .500"	.375"	3.5M
	#12-24 x 1-1/2"	DP5	.250" - .500"	.625"	2.5M
	#12-24 x 2"	DP5	.250" - .500"	1.125"	2M
D	1/4-14 x 7/8"	DP1 W/VRT*	.036" - .090"	.325"	2.5M
	1/4-14 x 3/4"	DP3	.036" - .250"	.210"	2.5M
	1/4-14 x 1"	DP3	.036" - .250"	.460"	2.5M
	1/4-14 x 1-1/4"	DP3	.036" - .250"	.710"	2M
	1/4-14 x 1-1/2"	DP3	.036" - .250"	.960"	2M
	1/4-14 x 2"	DP3	.036" - .250"	1.460"	1.5M
	1/4-14 x 2-1/2"	DP3	.036" - .250"	2.460"	1M
	1/4-14 x 4"	DP3	.036" - .250"	3.460"	500
	1/4-14 x 5"	DP3	.036" - .250"	4.460"	500
	1/4-14 x 6"	DP3	.036" - .250"	5.460"	250
E	1/4-20 x 4"	DP5	.250" - .500"	3.000"	500
	1/4-20 x 5"	DP5	.250" - .500"	4.000"	500
	1/4-20 x 6"	DP5	.250" - .500"	5.000"	250
	1/4-20 x 7"	DP5	.250" - .500"	6.000"	150
	1/4-20 x 8"	DP5	.250" - .500"	7.000"	150
	F	1/4-20 x 4"	DP5	.250" - .500"	3.000"
1/4-20 x 5"		DP5	.250" - .500"	4.000"	500
1/4-20 x 6"		DP5	.250" - .500"	5.000"	250
1/4-20 x 7"		DP5	.250" - .500"	6.000"	150


MATERIAL: C1018-1022 Carbon Steel

PLATING: .0003" Min. Zinc w/TRI-SEAL™ Coating (1,000hrs Salt Spray)

Proper Fastener Installation



CORRECT
Slight circle of sealant extrudes to outer edge.



TOO TIGHT!
Metal backing begins to turn up.



TOO LOOSE
Sealant is not compressed and can not form a seal.

To assure a proper seal, torque the fastener until the EPDM sealant extrudes to the outer edge of the backing material.

BLAZER[®] FLANGE-SEAL HEAD WITH EPDM WASHER



LP denotes long-pilot design for metal roofing and siding

HEAD TYPE
#12 dia: 5/16" HWH
1/4 dia: 5/16" HWH



WASHER DETAILS
.125" Thick EPDM

- ▶ **FLANGE-SEAL™** self-sealing fastener has a deep undercut head that entraps the EPDM sealing washer to assure a leak free seal.
- ▶ **TRI-SEAL™** long-life coated for superior corrosion protection.

SIZES AND PERFORMANCE SPECIFICATIONS

	Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity
G	#12-14 x 3/4"	DP2/DP3	.036" - .210"	.290"	5M
	#12-14 x 1"	DP2/DP3	.036" - .210"	.525"	3.5M
	#12-14 x 1-1/4"	DP2/DP3 LP	.036" - .210"	.750"	3.5M
	#12-14 x 1-1/2"	DP2/DP3	.036" - .210"	1.000"	2.5M
	#12-14 x 2"	DP2/ DP3	.036" - .210"	1.500"	2M
	#12-14 x 2-1/2"	DP2/DP3	.036" - .210"	2.000"	1M
H	1/4-14 x 7/8"	DP1 W/VRT*	.036" - .090"	.325"	2.5M
I	1/4-14 x 3/4"	DP3*	.036" - .250"	.210"	2.5M
	1/4-14 x 1"	DP3*	.036" - .250"	.460"	2.5M
	1/4-14 x 1-1/2"	DP3*	.036" - .250"	.960"	2M

MATERIAL: C1018-1022 Carbon Steel

PLATING: .0003" Min. Zinc w/TRI-SEAL™ Coating (1,000hrs Salt Spray)

BLAZER® STAINLESS CAP HEAD WITH EPDM SEALING WASHER



- ▶ 304 stainless steel cap head for exceptional corrosion resistance.
- ▶ Our special head is designed to produce maximum torsional strength and a leak free seal.
- ▶ TRI-SEAL™ long life coated shank for superior corrosion protection.

SIZES AND PERFORMANCE SPECIFICATIONS

	Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity
F	#12-14 x 1"	DP2/DP3	.036" - .210"	.525"	3.5M
	#12-14 x 1-1/4"	DP2/DP3 LP	.036" - .210"	.750"	3.5M
	#12-14 x 1-1/2"	DP2/DP3	.036" - .210"	1.000"	2.5M
	#12-14 x 2"	DP2/DP3	.036" - .210"	1.500"	2M
G	1/4-14 x 7/8"	DP1 W/VRT	.036" - .090"	.325"	2.5M
	1/4-14 x 3/4"	DP3	.036" - .250"	.210"	2.5M
H	1/4-14 x 1"	DP3	.036" - .250"	.460"	2.5M
	1/4-14 x 1-1/4"	DP3	.036" - .250"	.375"	2M
	1/4-14 x 1-1/2"	DP3	.036" - .250"	.960"	2M
I	#17-14 x 1"	TYPE AB W/VRT	20ga or less	.750"	2.5M

MATERIAL


HEAD: 302 Stainless Steel
 THREAD: Carbon Steel

PLATING

HEAD: Passivated
 THREAD: .0003" Min. Zinc with TRI-SEAL™ Long-life Coating

CORROSION

HEAD: >2,000hrs Salt Spray
 THREAD: 1,000hrs Salt Spray



WASHER DETAILS
 .100" Thick EPDM



HEAD TYPE
 #12 dia: 5/16" HWH
 1/4 dia: 5/16" HWH
 #17 dia: 5/16" HWH

BLAZER® ZINC CAP HEAD WITH EPDM SEALING WASHER



- ▶ ZAMAC 5 zinc alloy cap head for premium corrosion resistance **WILL NOT RED RUST!**
- ▶ Special head is designed to produce maximum torsional strength and a leak free seal.

SIZES AND PERFORMANCE SPECIFICATIONS

	Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity
A	#12-14 x 1"	DP2/DP3	.036" - .210"	.525"	3.5M
	#12-14 x 1-1/4"	DP2/DP3 LP	.036" - .210"	.750"	3.5M
	#12-14 x 1-1/2"	DP2/DP3	.036" - .210"	1.000"	2.5M
	#12-14 x 2"	DP2/DP3	.036" - .210"	1.500"	2M
B	1/4-14 x 7/8"	DP1 W/VRT	.036" - .090"	.325"	2.5M
	1/4-14 x 3/4"	DP3	.036" - .250"	.210"	2.5M
C	1/4-14 x 1"	DP3	.036" - .250"	.460"	2.5M
	1/4-14 x 1-1/4"	DP3	.036" - .250"	.375"	2M
	1/4-14 x 1-1/2"	DP3	.036" - .250"	.960"	2M
D	1/4-14 x 1"	TYPE AB	20ga or less	.750"	2.5M
E	#17-14 x 1"	TYPE AB	20ga or less	.750"	2.5M

MATERIAL


HEAD: Zamac 5 Zinc Alloy
 THREAD: Carbon Steel

PLATING

HEAD: Plain Finish
 THREAD: .0003" Min. Zinc with TRI-SEAL™ Long-life Coating.

CORROSION RESISTANCE

HEAD: No Red Rust
 THREAD: 1,000hrs Salt Spray



WASHER DETAILS
 .125" Thick EPDM



HEAD TYPE
 #12 dia: 5/16" HWH
 1/4 dia: 5/16" HWH
 #17 dia: 5/16" HWH

